



# L形側溝 (JIS A 5372 附属書5 推奨仕様5-4)


## L形側溝

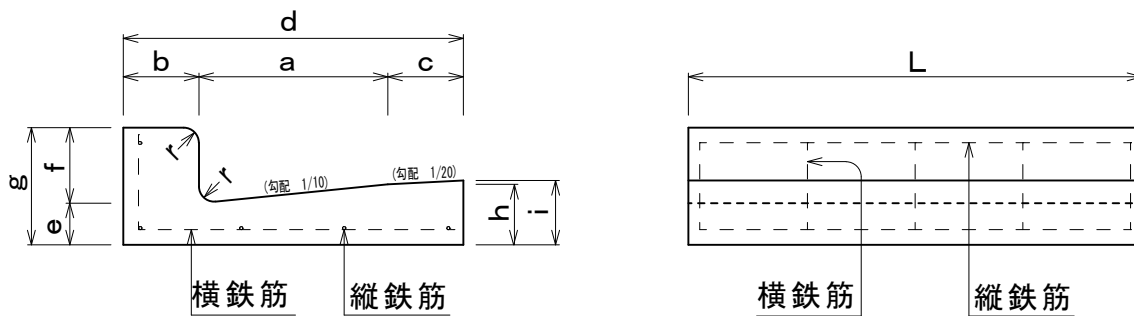

## すりつけ型 (斜)

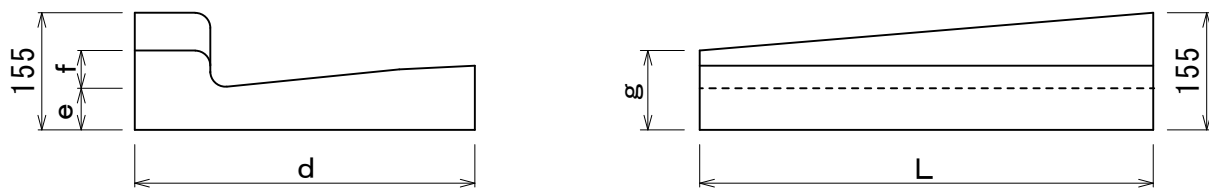

## 切り下げ型 (平)

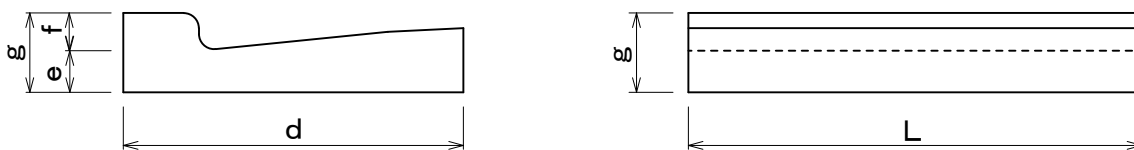

寸法及び配筋表

呼び (種類)	寸法 (mm)											配筋				重量 (kg)
	a	b	c	d	e	f	g	h	i	r	L	横鉄筋		縦鉄筋		
												径 (mm)	本数	径 (mm)	本数	
250A	250	100	-	350	55	100	155	80	-	20	600	4	5	4	4	4.7
250A斜 (MT-20)	250	100	-	350	55	20	75	80	-	20	600	4	5	4	4	4.1
250A平 (MD-20)	250	100	-	350	55	20	75	80	-	20	600	4	5	4	4	3.5
250A斜 (MT-50)	250	100	-	350	55	50	105	80	-	20	600	4	5	4	4	4.3
250A平 (MD-50)	250	100	-	350	55	50	105	80	-	20	600	4	5	4	4	4.0
250B	250	100	100	450	55	100	155	80	85	20	600	4	5	4	5	5.9
250B斜 (MT-20)	250	100	100	450	55	20	75	80	85	20	600	4	5	4	5	5.3
250B平 (MD-20)	250	100	100	450	55	20	75	80	85	20	600	4	5	4	5	4.7
250B斜 (MT-50)	250	100	100	450	55	50	105	80	85	20	600	4	5	4	5	5.5
250B平 (MD-50)	250	100	100	450	55	50	105	80	85	20	600	4	5	4	5	5.2
300	300	100	100	500	55	100	155	85	90	20	600	4	6	4	5	6.5
300斜 (MT-20)	300	100	100	500	55	20	75	85	90	20	600	4	6	4	5	5.9
300平 (MD-20)	300	100	100	500	55	20	75	85	90	20	600	4	6	4	5	5.3
300斜 (MT-50)	300	100	100	500	55	50	105	85	90	20	600	4	6	4	5	6.1
300平 (MD-50)	300	100	100	500	55	50	105	85	90	20	600	4	6	4	5	5.8
350	350	100	100	550	55	100	155	90	95	20	600	6	5	4	5	7.2
350斜 (MT-50)	350	100	100	550	55	50	105	90	95	20	600	6	5	4	5	6.8
350平 (MD-50)	350	100	100	550	55	50	105	90	95	20	600	6	5	4	5	6.5