


重耐用横断側溝 (THG型)


本体

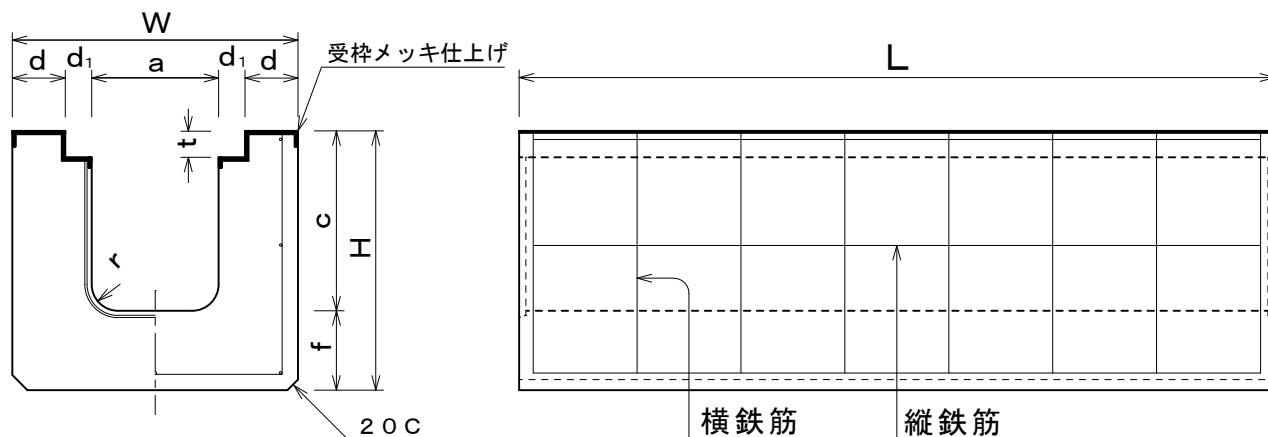

寸法及び配筋表

呼び	寸法 (mm)										配筋				重量 (kg)
	a	c	d	d ₁	f	t	r	W	H	L	横鉄筋		縦鉄筋		
											径 (mm)	本数	径 (mm)	本数	
THG240A	240	340	100	50	150	60	50	540	490	2000	D10	12	5.0	7	89.5
THG240B	240	400	100	50	150	60	50	540	550	2000	D10	12	5.0	8	98.3
THG240C	240	500	100	50	150	60	50	540	650	2000	D10	12	5.0	9	113.0
THG240D	240	600	100	50	150	60	50	540	750	2000	D10	12	5.0	10	127.7
THG240E	240	700	100	50	150	60	50	540	850	2000	D10	12	5.0	11	142.4
THG240F	240	800	100	50	150	60	50	540	950	2000	D10	12	5.0	12	157.1
THG240G	240	900	100	50	150	60	50	540	1050	2000	D10	12	5.0	13	171.8
THG300A	300	340	95	55	150	65	50	600	490	2000	D10	12	5.0	7	93.4
THG300B	300	400	95	55	150	65	50	600	550	2000	D10	12	5.0	8	102.2
THG300C	300	500	95	55	150	65	50	600	650	2000	D10	12	5.0	9	116.9
THG300D	300	600	95	55	150	65	50	600	750	2000	D10	12	5.0	10	131.6
THG300E	300	700	95	55	150	65	50	600	850	2000	D10	12	5.0	11	146.3
THG300F	300	800	95	55	150	65	50	600	950	2000	D10	12	5.0	12	161.0
THG300G	300	900	95	55	150	65	50	600	1050	2000	D10	12	5.0	13	175.7
THG300H	300	1000	95	55	150	65	50	600	1150	2000	D10	12	5.0	14	190.4
THG300I	300	1100	95	55	150	65	50	600	1250	2000	D10	14	5.0	15	205.1
THG400A	400	400	95	55	150	75	50	700	550	2000	D13	10	6.0	9	109.1
THG400B	400	500	95	55	150	75	50	700	650	2000	D13	10	6.0	10	123.8
THG400C	400	600	95	55	150	75	50	700	750	2000	D13	10	6.0	11	138.5
THG400D	400	700	95	55	150	75	50	700	850	2000	D13	10	6.0	12	153.2
THG400E	400	800	95	55	150	75	50	700	950	2000	D13	10	6.0	13	167.9
THG400F	400	900	95	55	150	75	50	700	1050	2000	D13	10	6.0	14	182.6
THG400G	400	1000	95	55	150	75	50	700	1150	2000	D13	10	6.0	15	197.3
THG500A	500	600	95	55	150	85	50	800	750	2000	D13	12	6.0	11	145.4
THG500B	500	700	95	55	150	85	50	800	850	2000	D13	12	6.0	12	160.1
THG500C	500	800	95	55	150	85	50	800	950	2000	D13	12	6.0	13	174.8
THG500D	500	900	95	55	150	85	50	800	1050	2000	D13	12	6.0	14	189.5
THG500E	500	1000	95	55	150	85	50	800	1150	2000	D13	12	6.0	15	204.2
THG600A	600	700	95	55	150	100	50	900	850	2000	D13	14	6.0	13	167.4
THG600B	600	800	95	55	150	100	50	900	950	2000	D13	14	6.0	14	182.1
THG600C	600	900	95	55	150	100	50	900	1050	2000	D13	14	6.0	15	196.8
THG600D	600	1000	95	55	150	100	50	900	1150	2000	D13	14	6.0	16	211.5
THG600E	600	1100	95	55	150	100	50	900	1250	2000	D13	14	6.0	17	226.2

固定式グレーチングふた

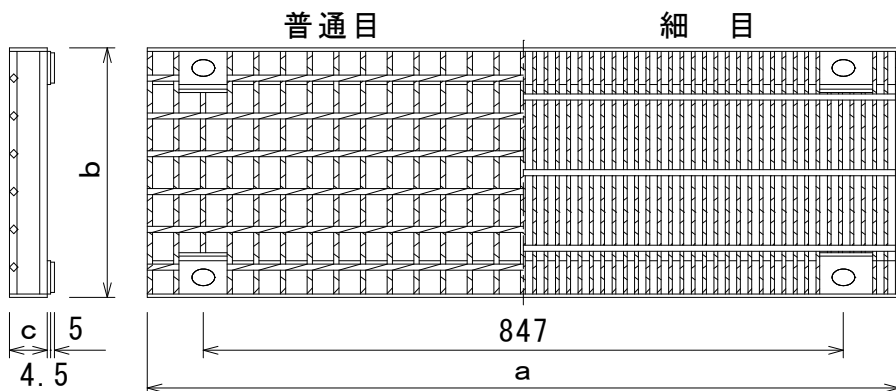


寸法表

呼び	寸法 (mm)			重量 (kg)	
	a	b	c	普通目	細目
240	995	330	50	26.8	39.7
300	995	400	55	34.0	50.1
400	995	500	65	47.3	75.1
500	995	600	75	63.0	90.7
600	995	700	90	82.1	114.8

重耐用横断側溝 (THT型)


本体

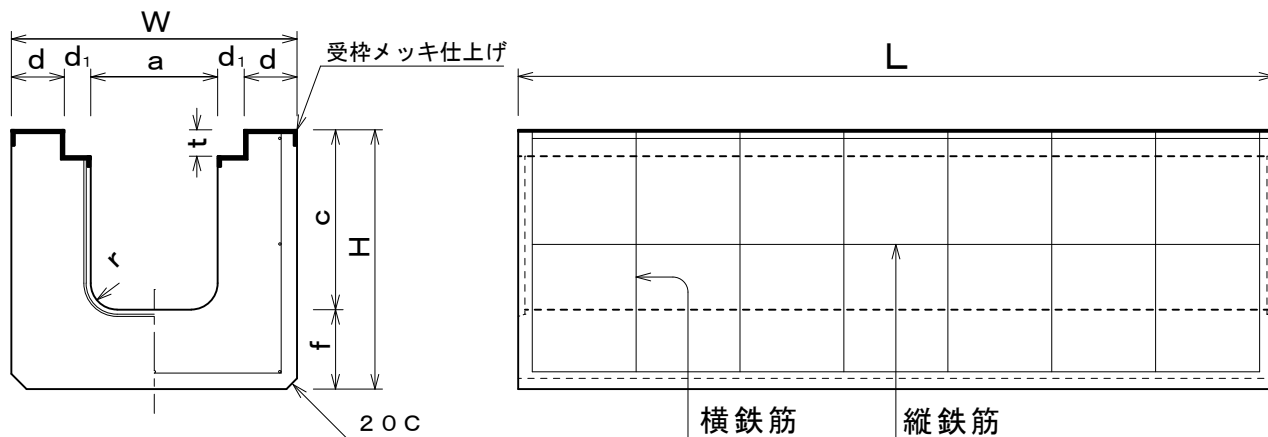

寸法及び配筋表

呼び	寸法 (mm)										配筋				重量 (kg)
	a	c	d	d ₁	f	t	r	W	H	L	横鉄筋		縦鉄筋		
											径 (mm)	本数	径 (mm)	本数	
THT240A	240	340	100	50	150	50	50	540	490	2000	D10	12	5.0	7	899
THT240B	240	400	100	50	150	50	50	540	550	2000	D10	12	5.0	8	987
THT240C	240	500	100	50	150	50	50	540	650	2000	D10	12	5.0	9	1134
THT240D	240	600	100	50	150	50	50	540	750	2000	D10	12	5.0	10	1281
THT240E	240	700	100	50	150	50	50	540	850	2000	D10	12	5.0	11	1428
THT240F	240	800	100	50	150	50	50	540	950	2000	D10	12	5.0	12	1575
THT240G	240	900	100	50	150	50	50	540	1050	2000	D10	12	5.0	13	1722
THT300A	300	340	98	52	150	50	50	600	490	2000	D10	12	5.0	7	943
THT300B	300	400	98	52	150	50	50	600	550	2000	D10	12	5.0	8	1031
THT300C	300	500	98	52	150	50	50	600	650	2000	D10	12	5.0	9	1178
THT300D	300	600	98	52	150	50	50	600	750	2000	D10	12	5.0	10	1325
THT300E	300	700	98	52	150	50	50	600	850	2000	D10	12	5.0	11	1472
THT300F	300	800	98	52	150	50	50	600	950	2000	D10	12	5.0	12	1619
THT300G	300	900	98	52	150	50	50	600	1050	2000	D10	12	5.0	13	1766
THT300H	300	1000	98	52	150	50	50	600	1150	2000	D10	12	5.0	14	1913
THT300I	300	1100	98	52	150	50	50	600	1250	2000	D10	14	5.0	15	2060
THT400A	400	400	98	52	150	50	50	700	550	2000	D13	10	6.0	9	1104
THT400B	400	500	98	52	150	50	50	700	650	2000	D13	10	6.0	10	1251
THT400C	400	600	98	52	150	50	50	700	750	2000	D13	10	6.0	11	1398
THT400D	400	700	98	52	150	50	50	700	850	2000	D13	10	6.0	12	1545
THT400E	400	800	98	52	150	50	50	700	950	2000	D13	10	6.0	13	1692
THT400F	400	900	98	52	150	50	50	700	1050	2000	D13	10	6.0	14	1839
THT400G	400	1000	98	52	150	50	50	700	1150	2000	D13	10	6.0	15	1986
THT500A	500	600	98	52	150	65	50	800	750	2000	D13	12	6.0	11	1464
THT500B	500	700	98	52	150	65	50	800	850	2000	D13	12	6.0	12	1611
THT500C	500	800	98	52	150	65	50	800	950	2000	D13	12	6.0	13	1758
THT500D	500	900	98	52	150	65	50	800	1050	2000	D13	12	6.0	14	1905
THT500E	500	1000	98	52	150	65	50	800	1150	2000	D13	12	6.0	15	2052
THT600A	600	700	98	52	150	65	50	900	850	2000	D13	14	6.0	13	1685
THT600B	600	800	98	52	150	65	50	900	950	2000	D13	14	6.0	14	1832
THT600C	600	900	98	52	150	65	50	900	1050	2000	D13	14	6.0	15	1979
THT600D	600	1000	98	52	150	65	50	900	1150	2000	D13	14	6.0	16	2126
THT600E	600	1100	98	52	150	65	50	900	1250	2000	D13	14	6.0	17	2273

トライポット式グレーチングふた

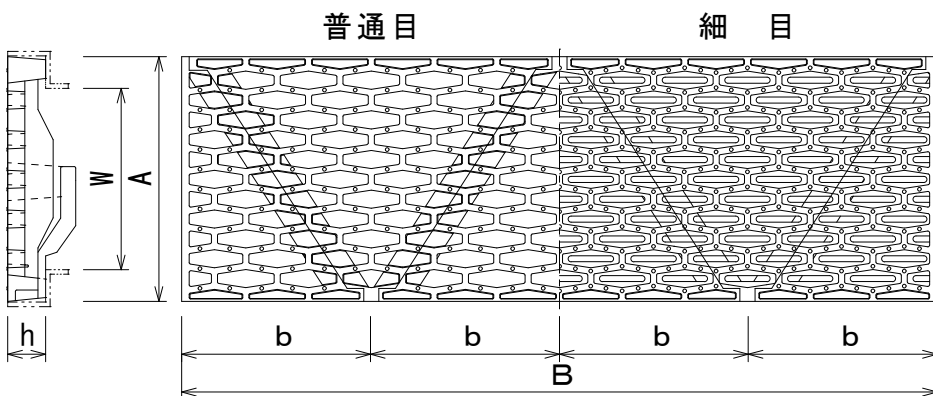

寸法表

呼び (W)	寸法 (mm)				重量 (kg/m)	
	A	b	B	h	普通目	細目
240	335	250	1000	50	34	37
300	400	250	1000	50	45	47.8
400	500	250	1000	50	59	63
500	600	333	1000	65	74	86.2
600	700	333	1000	65	85	96.5