


特殊L形側溝 (LUふた)

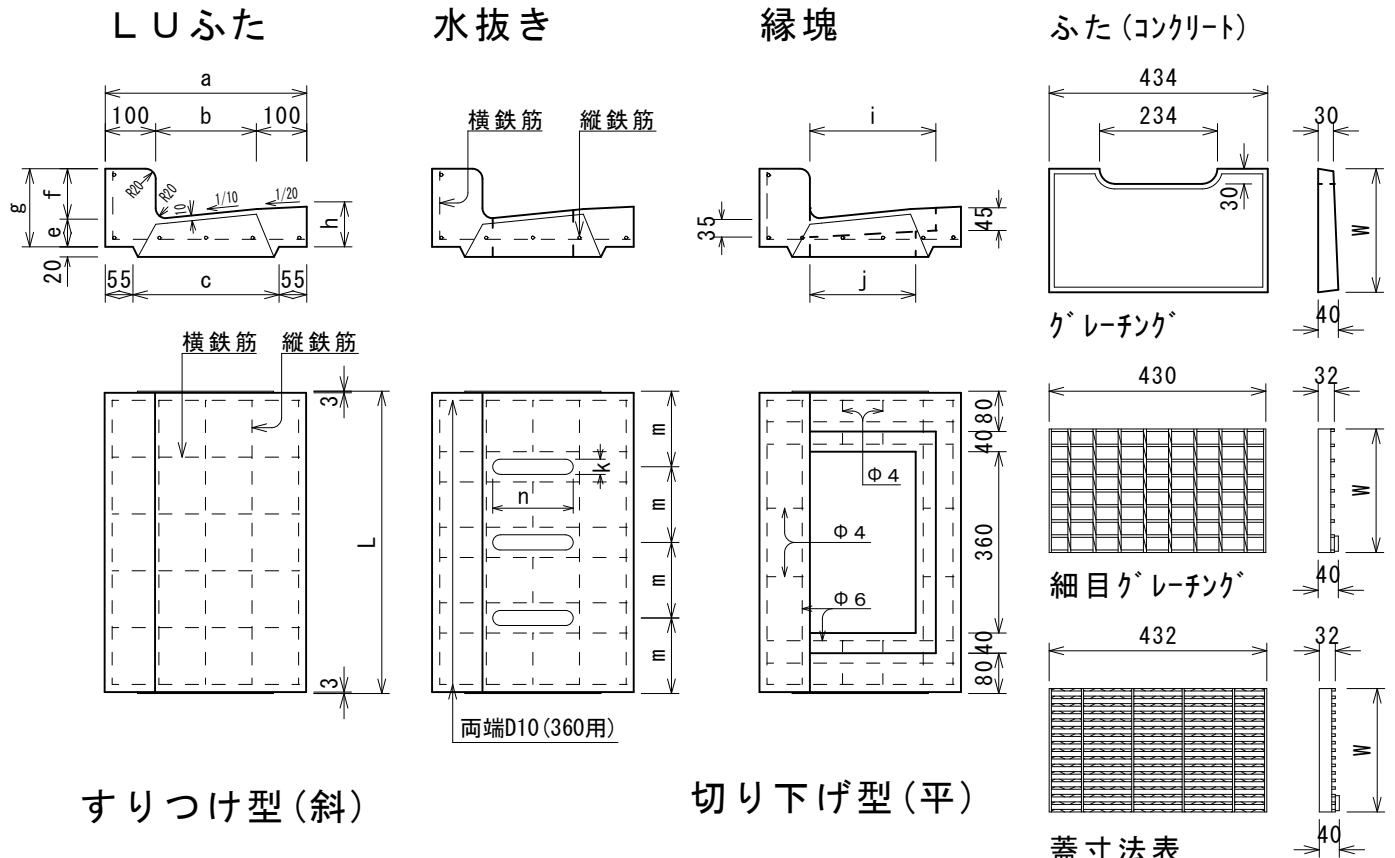

すりつけ型(斜)

切り下げ型(平)

蓋寸法表

呼び	W (mm)	重量 (kg)	種類
240	205	8.0	コン蓋
		4.0	グレ
		5.5	細グレ
300	245	10.0	コン蓋
		4.3	グレ
		7.7	細グレ

寸法及び配筋表

呼び	寸法 (mm)														配筋				重量 (kg)
	a	b	c	e	f	g	h	i	j	k	m	n	L	横鉄筋 (mm)	横鉄筋 本数	縦鉄筋 (mm)	縦鉄筋 本数		
特殊 L形	240	340	140	230	55	100	155	74	-	-	-	-	-	600	6	6	6	6	5.1
	240斜 (MT-20)	340	140	230	55	20	75	74	-	-	-	-	-	600	6	6	6	6	4.5
	240平 (MD-20)	340	140	230	55	20	75	74	-	-	-	-	-	600	6	6	6	5	3.9
	240斜 (MT-50)	340	140	230	55	50	105	74	-	-	-	-	-	600	6	6	6	6	4.7
	240平 (MD-50)	340	140	230	55	50	105	74	-	-	-	-	-	600	6	6	6	5	4.3
	300	400	200	290	55	100	155	80	-	-	-	-	-	600	6	6	6	6	6.1
	300斜 (MT-20)	400	200	290	55	20	75	80	-	-	-	-	-	600	6	6	6	6	5.7
	300平 (MD-20)	400	200	290	55	20	75	80	-	-	-	-	-	600	6	6	6	5	4.9
	300斜 (MT-50)	400	200	290	55	50	105	80	-	-	-	-	-	600	6	6	6	6	5.7
	300平 (MD-50)	400	200	290	55	50	105	80	-	-	-	-	-	600	6	6	6	5	5.3
	360	450	250	340	100	100	200	130	-	-	-	-	-	600	D10	5	6	7	9.9
	360斜 (MT-50)	450	250	340	100	50	150	130	-	-	-	-	-	600	D10	5	6	7	9.5
360平 (MD-50)	450	250	340	100	50	150	130	-	-	-	-	-	600	D10	5	6	7	9.1	
水抜き	240	340	140	230	55	100	155	74	-	-	30	150	140	600	6	6	6	6	8.4
	240平 (MD-50)	340	140	230	55	50	105	74	-	-	30	150	140	600	6	6	6	6	7.4
	300	400	200	290	55	100	155	80	-	-	30	150	200	600	6	6	6	6	8.5
	300平 (MD-50)	400	200	290	55	50	105	80	-	-	30	150	200	600	6	6	6	6	7.5
	360	450	250	340	100	100	200	130	-	-	30	150	200	600	D6	5	6	7	9.3
	360平 (MD-50)	450	250	340	100	50	150	130	-	-	30	150	200	600	D6	5	6	7	8.5
縁塊	240	340	140	230	55	100	155	74	210	170	-	-	-	600	6	6	6	6	3.5
	240平 (MD-20)	340	140	230	55	20	75	74	210	170	-	-	-	600	6	6	6	6	2.3
	240平 (MD-50)	340	140	230	55	50	105	74	210	170	-	-	-	600	6	6	6	6	2.7
	300	400	200	290	55	100	155	80	250	210	-	-	-	600	6	6	6	6	4.1
	300平 (MD-20)	400	200	290	55	20	75	80	250	210	-	-	-	600	6	6	6	6	2.9
	300平 (MD-50)	400	200	290	55	50	105	80	250	210	-	-	-	600	6	6	6	6	3.3